



WE HAVE AN EYE  
ON YOUR  
CONVEYING NEEDS



## Aust-Mech ADOG Drive Over Grid Features

- High Capacity 5 - 7 t/min
- Heavy Duty Construction
  - 6mm Auger Flighting
  - 4mm Barrel
  - Integrated Beam Design
  - 20 tonne axle load rating
- Large Deck Area
  - 3.2m x 1.5m
- Low Profile Deck
- Walkthrough Operator Access Platform & Control Console
- Self Propulsion Option
- Electric or Hydraulic Drive
- Grain Door Bulkheads (Hydraulic Option)
- Hydraulically Lifting Wheels
- Adjustable Flow Control
- Hinged Folding Ramps (Hydraulic Option)
- High Outload Point
- Clean Out Hatches
- Various Powerpack Options
- Safety Stands
- Servicability Built in

## Examples of our other Products

- ◇ **Mobile Tubeveyors**  
to 2.5 tonne per minute  
up to 90" in length
- ◇ **Mobile Tubeveyors**  
to 10 tonne per minute  
up to 140" in length
- ◇ **Cross Sweep**  
up to 6mt wide retrieval blade  
single man operation
- ◇ **Circular Silo Systems**  
to 10 tonne per minute  
Custom designed to your requirements
- ◇ **Fixed Container Filling Systems - Grain**  
to 5 tonne per minute  
Grains, Pulses
- ◇ **Mobile Receiveal Grid & Bunker Stacker**  
to 9 tonne per minute  
Bunker widths to 37mt
- ◇ **Swing-Away**  
up to 3mt wide hopper  
capacity matched to Tubeveyor
- ◇ **Under Silo Systems**  
to 10 tonne per minute  
Custom designed to your requirements
- ◇ **Fixed Container Filling Systems - Cottonseed**  
to 4 tonne per minute  
20' & 40' Containers
- ◇ **Swing-Away**  
up to 3mt wide hopper  
capacity matched to Tubeveyor
- ◇ **Tilting Container Filling Systems**  
to 7 tonne per minute  
30, 45 & 90 degrees
- ◇ **Custom & Industrial Systems**  
Specialists in Design and Customization

## Aust-Mech Contacts.

### Works & Administration

PO Box 858  
19 Darlow Street,  
Dalby, Qld. 4405  
**Ph. (07) 4662 4200**  
Fx. (07) 4662 4943  
sales@austmech.com

[www.austmech.com](http://www.austmech.com)

Aust-Mech  
products are  
Designed and  
Manufactured by us  
in Australia



# ADOG Drive Over Receiveal Grid

(Auger Type)



The Aust-Mech ADOG Drive Over Receival Grid incorporates 30 years of industry knowledge and experience to achieve the highest level in strength, capacity and longevity in the auger type drive over market.

With unsurpassed strength from the integrated beam design of the deck, 6mm auger flighting and 4mm barrel, longevity and robustness are inbuilt into the Aust-Mech ADOG.

Transportability and Mobility remain a feature of the Aust-Mech ADOG with rapid pack-up for transport, agility around site and optional self propulsion kit, end or side tow kits available

### High Capacity

with a rated capacity of 5 - 7 tonnes per minute depending on grain type the Aust-Mech ADOG has been matched for capacity to our range of 14" Tubeveyors and larger PTO Augers. Fitted with under-grate adjustable flow control

### Large Grate Area

3.2mt x 1.5mt (Grate only)  
3.2mt x 2.7mt (w/- Bulkheads)  
Clean out hatches are fitted as standard

### Operator Access Platform

Walk through access for operator provides quick and safe access to either side of the grate. Operator controls are located on this platform

- \* **Guaranteed Capacity**
- \* **Gentleness on Product**
- \* **Durability**
- \* **Ease of Service**

### Self Propulsion Kit (Opt)

To facilitate movement of the ADOG around site and along the bunker an optional self propulsion kit is available. On board hydraulic controls provide 'skid-steer' type steering for high levels of mobility and accuracy of alignment to the receiving Tubeveyor or auger

### Hydraulic Lift Wheels (Std)


Lifting of the ADOG is achieved by hydraulic rams fitted to the heavy duty wheel arms, approach ramps lift with deck. Hydraulic power is provided by Tractor/Tubeveyor remotes or on-board hydraulic power pack

### Low Profile Design

The Aust-Mech ADOG features an integrated beam design to ensure the lowest possible deck height while maintaining maximum capacity and strength. This low profile also ensures easy clearance of any truck combination while passing over deck.

### Grain Deck Bulkheads

fitted to each end of the deck to eliminate overflow from the deck. Can be hydraulically raised (optional) to assist this feature and also self cleaning at end of load.

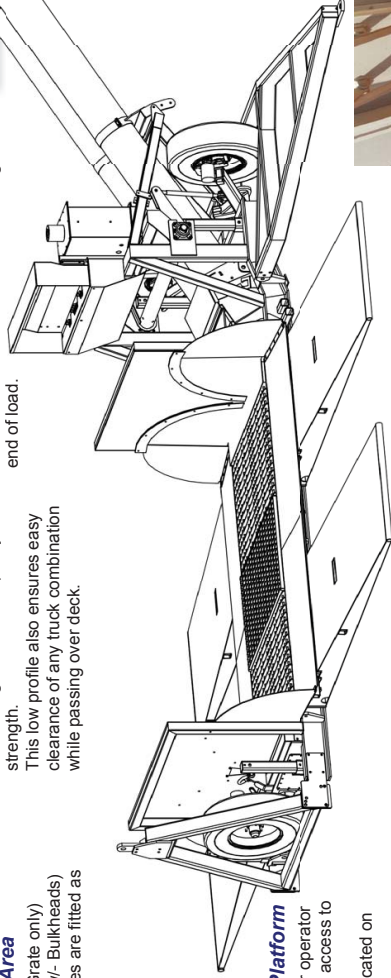

### Industrial Duty Design

- 6mm Auger Flighting
- 4mm Barrel
- Integrated Beam Design
- Heavy Duty internal members
- 20 tonne axle load rating



### Drive Options

**Hydraulic Drive** - fitted with twin head mounted hydraulic motors with hydraulic power provided from Diesel Hydraulic Tubeveyor or Tractor Remotes  
**Electric Drive** - fitted with twin head end mounted 3phase 415V electric motors & on-board starters with V Belt drive to augers

### Towing Kits (Opt)

Side Tow Kit - used for moving ADOG around site if self-propulsion not fitted  
End Tow Kit - for movement between sites or for loading onto step-deck trailer

### PowerPack Options

**25hp Petro/Hyd**

Wheel drive, chassis lift, bulkheads & Ramps

**7hp Petro/Hyd**

Chassis lift, bulkheads & Ramps

### Hydraulic Ramps (Opt)

Available as an option is hydraulic raise/lower functions for the approach ramps

### High Outload Point

Provides easy clearance over receiving Tubeveyor or Auger Hopper

### Servicability

The ADOG has been designed to be easy to service.
 

- all ager sections are removable with the bearings still on the shaft
- the center grid section is removable to access under grate
- Aust-Mech offer an infield breakdown and service facility

